

Water tight enclosure

houses all electrical components

Prewired electrical

Detergent & Wax

Detergent & Wax metering valves Heavy duty belt

flow indicators

Double groove pulleys and belts

or 1P motors

weep system

Belt tensioners

Stainless steel

float tanks

Industrial rated 3P

Automatic or manual

panel

quards



Formica control panel (keeps unit looking new for years)

Cycle indicator lights

Heavy duty motor

Built-in adjustable motor protection

All electrical components UL approved

Stainless steel solenoid valves

Glycerine filled pressure gauges

Pressure regulating valve & pulsation dampener

E-Z pump oil drain system

Preplumbed (ready for hose hook up)

 Adjustable leveling feet

Section 19 Control 19




A-OK's Deluxe Pumping Station
Is Economical And Built
To Stay That Way!

A-OK EQUIPMENT & SUPPLY CO., INC.

Designers • Manufacturers • Distributors of Quality Wash Systems at Affordable Prices

6031 Pillsbury Ave. So., Minneapolis, MN 55419 • (612) 866-2555 Nationwide: 1-800-328-3783 • Minnesota: 1-800-762-3795 • Fax (612) 866-2562 E-mail: carwash@aokequipment.com • Website: www.aokequipment.com



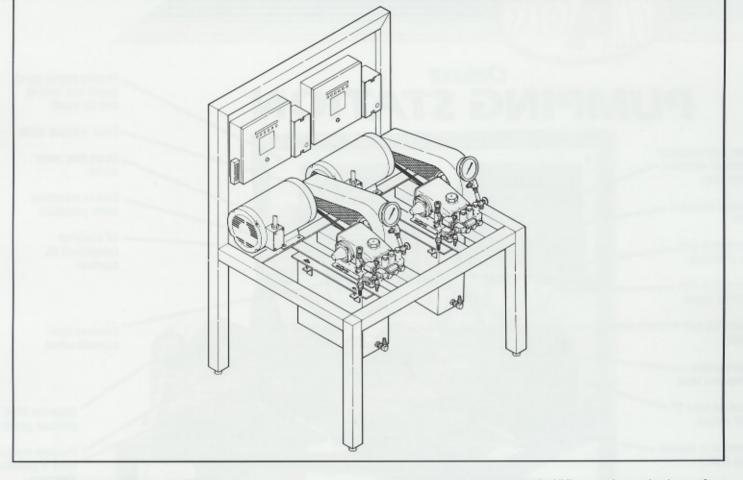

DELUXE PUMPING STATION

A-OK's Deluxe Pumping Station is economical and built to stay that way! Its energy efficient design saves operating dollars. The individual stainless steel, fresh water supply float tanks allow the unit to operate with either instantaneous or storage type water heaters. The unique design of the system has the pump, motor and all electrical controls conveniently located well up off the floor, for ease in maintenance. With just a glance at the pumping station, you or your attendant can monitor the cycle indicator lights, the pump pressure gauge reading, and the detergent and wax flow rate indicators. Pulley belt adjustments are a snap with the front mounted belt tensioning device. Changing oil in your pump's crankcase is as easy as opening a valve, no fuss, no mess. The heavy duty adjustable overload motor starter protects against motor burn out. The frame is constructed of heavy gauge tubular steel with adjusting levelers on each leg, and is painted with oven-baked enamel paint, the frame is also available in stainless steel. The Deluxe Pumping Station comes completely preplumbed and prewired. Each and every pumping station must pass a thorough in-plant testing procedure before shipment. The system is available with 3-phase or 1-phase motor, manual or automatic weep system. Hot or cold water rinse is another option available to

accommodate your needs. Why not have the best of both worlds—Quality equipment with an economical price tag!

DELUXE PUMPING STATION FEATURES:

Water tight enclosure protects all electrical components.
 All components are UL approved.
 Detergent and wax flow indicators.
 Cycle indicator lights.
 Heavy duty motor starters, with built in adjustable thermal over-load protection.
 Stainless Steel Float Tanks.
 Stainless steel solenoid valves.
 Glycerine-filled pressure gauges.
 Pulley Belt tensioners.
 Convenient pump oil drain system.
 Economical manual or

automatic weep system. • Double groove pulleys and

belts. • Balance relief valves.

Dimensions: 1-Bay 48" H x 19" W x 30" D

2-Bay 48" H x 36" W x 30" D

2-Bay 240 lbs.

Electrical:

HP	Phase	Volts	Hz	Amps	S.F.	
3	3Ø	208/230/460	60	10	1.15	
5	3Ø	208/230/460	60	15	1.15	
3	10	230/460	60	17	1.15	
5	10	230/460	60	28	1.15	
Weight: 1-Bay		190 lbs.				

A-OK EQUIPMENT & SUPPLY CO., INC.

